ISaGRAF New feature

Message Delivery System

RS232/485/422

Other device

Wincon-8x36/8x37   or   Wincon-8x47/8x46
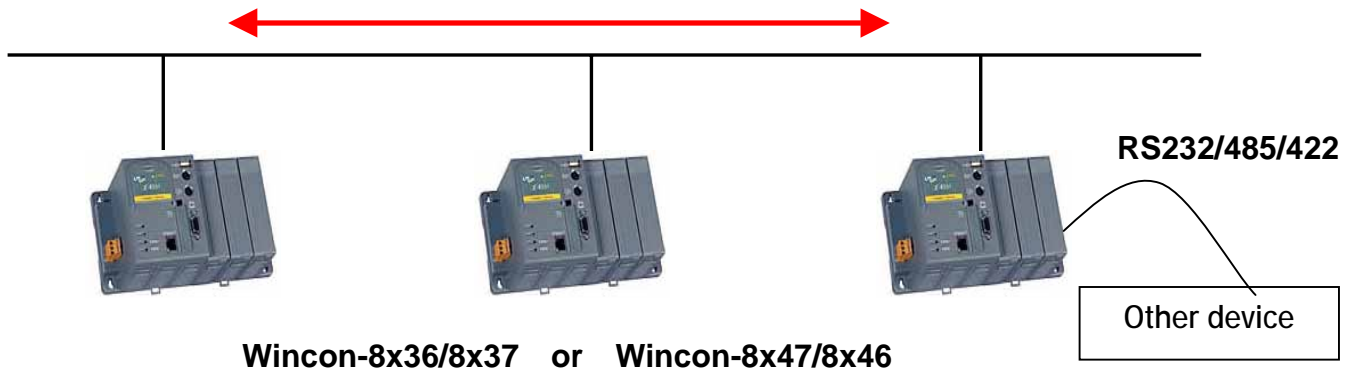
• Each Wincon can send string to other Local or Internet IP, Can send to max. 4 IP

• Each Wincon can receive string from remote IP, storing strings in the buffer, then pull out each one by one (First In, First Out)

• Using UDP/IP, Can be "PC <--> Wincon" or "Wincon <--> Wincon" or "Wincon <--> other device which supports UDP"

• Easy to program in ISaGRAF software by using "UDP_send" & "UDP_recv" functions. Users don't need to care about the ethernet communication.

• Wincon may send the received string to other device via RS232/485/422.